

# Universal

SERIES

*Built for strength. Built to last.*



*Model 225 SP with optional Stockton windows*

# MODEL 225



Model 225 Short Panel

Short Panel

The cost effective Model 225 offers exceptional value. The exterior of the door is embossed with a woodgrain texture finish accented by an elegant raised panel design. The door is composed of 25 gauge hot dipped galvanized steel with baked-on polyester paint and reinforced rail for strength and safety.

- ▲ 25 Gauge woodgrain textured steel
- ▲ Unique sculpted panel design
- ▲ Short and Long panel
- ▲ 2" section thickness
- ▲ Tongue and groove section rail
- ▲ All 21" sections include shadow groove
- ▲ Heavy gauge galvanized stiles
- ▲ Doors pre-painted white, almond, sandstone or brown
- ▲ 18" and 21" section heights
- ▲ Standard industry Hardware packs available
- ▲ Optional CFC free Polystyrene insulation with a rigid vinyl backskin. Calculated *R-Value* 6.25
- ▲ Limited *Lifetime* warranty
- ▲ Exclusive RITS™ "Reinforced Integral Truss System" Design

# MODEL 224



Model 224 Long Panel

Long Panel

For strength and longevity, the Model 224 utilizes heavy 24-gauge steel without sacrificing beauty. The exterior of the door is embossed with a woodgrain texture finish accented by a raised panel design. The door is composed of 24 gauge hot dipped galvanized steel with baked-on polyester paint and reinforced rail for strength and safety.

- ▲ 24 Gauge woodgrain textured steel
- ▲ Unique sculpted panel design
- ▲ Short, Long panel and Flush available
- ▲ 2" Section thickness
- ▲ Tongue and groove section rail
- ▲ Heavy gauge galvanized stiles
- ▲ Doors pre-painted white or almond
- ▲ 18" and 21" section heights
- ▲ Standard industry Hardware packs available
- ▲ Optional CFC free Polystyrene insulation with a rigid vinyl backskin. Calculated *R-Value* 6.25
- ▲ Limited *Lifetime* warranty
- ▲ Exclusive RITS™ "Reinforced Integral Truss System" Design

# MODEL 325/725 (SB)



Model 325/725 SP with optional Stockton Windows and Decorative Handles

Bead Panel

The Model 325/725 is built fusing 25 gauge steel and only the finest materials. Formed with unique bead board raised panel, the Model 325/725 is embossed with a natural wood grain texture raised panel with recessed vertical embossments and a baked-on polyester finish. The Model 325/725 will give your home the appearance of having custom wood carriage house doors with the durability and longevity of steel.

- ▲ 25 Gauge woodgrain textured steel
- ▲ Unique bead board raised panel design
- ▲ 2" section thickness
- ▲ Tongue and groove weather joint
- ▲ Heavy gauge galvanized stiles
- ▲ Pre-painted white (factory quote for availability and colors)
- ▲ 18" and 21" section heights
- ▲ Standard industry hardware packs available
- ▲ Optional CFC free Polystyrene insulation
- ▲ Rigid vinyl backskin (325)/steel back skin (725)
- ▲ Model 325 calculated R-Value 6.25/Model 725 calculated R-Value 9.0
- ▲ Optional window designs & decorative hardware packages
- ▲ Limited *Lifetime* warranty

# MODEL 625 (SB)



Model 625 SP with optional Sherwood Windows

Flush Panel

The Model 625 is a thermally efficient steel front and steel backed "sandwich style" door. Formed with a unique sculpted raised panel the Model 625 is embossed with a natural wood grain texture. The core is CFC free Polystyrene insulation with a steel back skin for thermal efficiency. The Model 625 door will add great value and beauty to any home.

- ▲ 26 Gauge woodgrain textured steel
- ▲ Unique sculpted panel design
- ▲ Short, Long panel or Flush available
- ▲ 2" section thickness
- ▲ Calculated R-Value 9.0
- ▲ Tongue and groove section rail
- ▲ Full length hinge strip
- ▲ Doors pre-painted white or almond
- ▲ 18" and 21" section heights
- ▲ Standard industry hardware packs available
- ▲ CFC free Polystyrene insulation with a steel back skin
- ▲ Limited *Lifetime* warranty

# Universal SERIES


www.universalgaragedoor.com




**Our gauges are true to industry standards!**

## Garage Door Standard Features

- 1 Steel back skin (Models 625/725 only)
- 2 Continuous internal verticle hinge strap
- 3 Tongue & groove section rail
- 4 Industry standard Hinges
- 5 Reinforced aluminum bottom retainer
- 6 Vinyl bottom weather seal

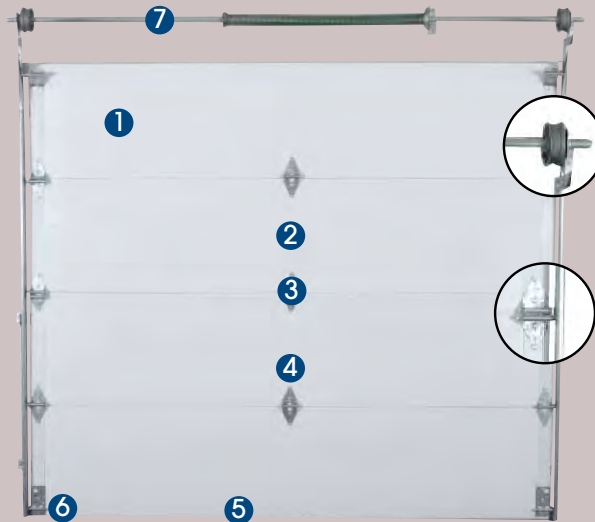

## Window Options

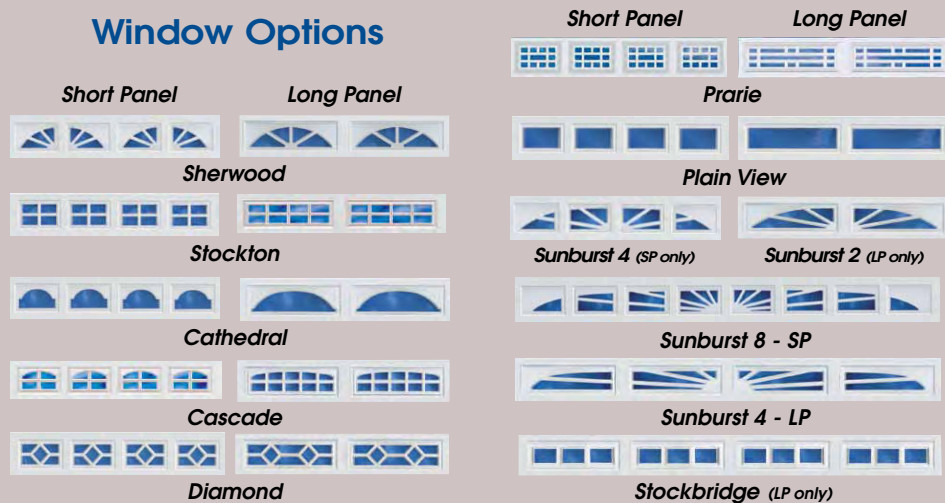


### Optional Energy Efficient Insulation

CFC free Polystyrene insulation with a rigid vinyl back skin, R factor of 6.25. Laminated PVC backing is available as a factory installed option. Calculated door section R-Values are in accordance with DASMA TDS-163.



### I-Beam Center Stiles

I-beam center stiles are engineered to reinforce the construction of the section and designed to eliminate the use of plastic reinforcement angles when the section is insulated. Pre-painted white end stiles are used for Models 625/725.

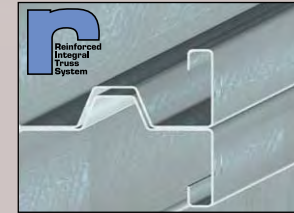

### Exclusive RITS™ Design

Exclusive RITS™ "Reinforced Integral Truss System" design, for increased section strength and wind-load capabilities that include tongue and groove weather resistant meeting rails.



### Reinforced Aluminum Bottom Extrusion

Heavy duty grooved "U" type weather seal is set into an aluminum reinforced "L" angle, and fastened to the bottom section.



Face/Back side colors: White/White; Almond/White; Brown/Sandstone; Sandstone/Brown  
\*Check with your local Dealer for price and availability. Color may vary. Factory color chip samples available for closer match.

**Warranty** - The Model 225, 725, 224 and 625 offer a limited lifetime warranty. 1st United Door Technologies warrants each garage door to be free from defects in material and workmanship to the original purchaser. A copy of this warranty is available upon request.

Universal Series garage doors are available with a wind load reinforcement system to withstand high-wind conditions. Factory quote only.

Distributed By:



**1st United Door Technologies, LLC** 7255 S. Kyrene Road | Tempe, Arizona 85283  
Phone: 480-705-6632 | Fax: 480-705-8497 | Toll Free: 866-366-7636

