

# Universal SERIES



## Model 325



Optional Large Stockton Windows

**BETTER**



Patent Pending

## Delano



Optional Small Stockton Windows - D5

**BEST**

The Model 325 is built fusing 25 gauge steel and only the finest materials. Formed with unique bead board raised panel, the Model 325 is embossed with a natural wood grain texture raised panel with recessed vertical embossments and a baked-on polyester finish. The Model 325 will give your home the appearance of having custom wood carriage house doors with the durability and longevity of steel.

- ▲ 25 Gauge woodgrain textured steel
- ▲ Unique bead board raised panel design
- ▲ 2" section thickness
- ▲ Tongue and groove weather joint
- ▲ Heavy gauge galvanized stiles
- ▲ Pre-painted white (factory quote for availability and colors)
- ▲ 18" and 21" section heights
- ▲ Industry Standard Hardware pack
- ▲ Optional CFC free Polystyrene insulation
- ▲ Rigid vinyl backskin
- ▲ Optional window designs & decorative hardware packages
- ▲ Lifetime Limited warranty

Steelite Series garage doors are built for strength and longevity. The Steelite Series offers 23 gauge steel without sacrificing beauty. The exterior of the door is embossed with a woodgrain texture finish accented by a recessed panel with protruding vertical embossments. These are cost effective garage doors produced with exceptional quality, using the finest materials.

- ▲ 23 Gauge woodgrain textured steel
- ▲ Unique vertical beaded panel design
- ▲ 2" Section thickness
- ▲ Tongue and groove weather joint
- ▲ Heavy gauge pre-painted white stiles
- ▲ Pre-painted white
- ▲ 24" and 28" section heights
- ▲ Industry Standard Hardware pack
- ▲ Optional CFC free Polystyrene insulation
- ▲ Rigid vinyl backskin
- ▲ Optional window designs & decorative hardware packages
- ▲ Lifetime limited warranty


# Universal SERIES



Model 325

## Window Options

Model 325 Window Options - Long Panel Only

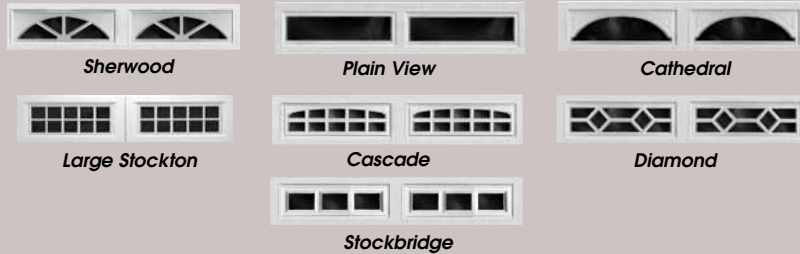


Delano



Patent Pending

## Window Options

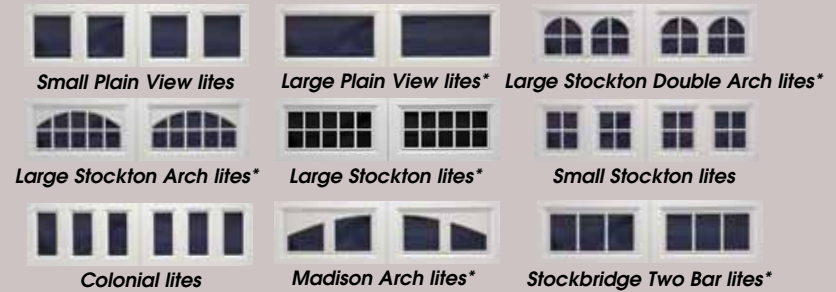

**The workmanship and quality materials ensure you have garage doors that are built for strength, longevity and durability.**

**Specifications** - Sections are 2 inches thick and manufactured from heavy-duty hot dipped galvanized steel. Sections are pre-painted white and rotary embossed with a wood grain texture. Tongue and groove-metering rails are roll formed into the panel incorporating the "RITS" reinforced integral truss system. Vertical stile members are 19-gauge hot dipped galvanized I-beams. Stiles are riveted and bonded to the interior face of the door with epoxy-based cement. Bottom sections are reinforced with aluminum "L" angle, and bonded to the bottom of the section for supporting a replaceable UV protected bottom weather seal. Standard industry hardware pack included.

**Warranty** - 1st United Door Technologies warrants each garage door to be free from defects in material and free from defects in material and workmanship to the original purchaser. A copy of this warranty is available upon request or downloadable from our website [www.firstudt.com](http://www.firstudt.com).

**R-Value** - Calculated door section R-Values are in accordance with DASMA TDS-163.

**Reinforced Aluminum Bottom Extrusion** - Heavy duty grooved "U" type weather seal is set into an aluminum reinforced "L" angle, chemically and mechanically fastened to the bottom section.

**I-Beam Center Stiles** - I-beam center stiles are engineered to reinforce the construction of the section and designed to eliminate the use of plastic reinforcement angles when the section is insulated. Galvanized stiles are used for the Model 325.

**Color** - Sections are pre-painted white. Steelite Delano only available in white. Model 325 available in additional colors (almond, sandstone or brown). Check with your local dealer for factory quote and availability. Face/Back side colors: white/white; almond/white; brown/sandstone; sandstone/brown.

### 1st United Door Technologies, LLC

7255 S. Kyrene Road • Tempe, Arizona 85283  
Phone: 480-705-6632 • Fax: 480-705-8497  
Toll Free: 866-366-7636  
[sales@firstudt.com](mailto:sales@firstudt.com) • [www.firstudt.com](http://www.firstudt.com)

### Optional decorative hardware packages available



Handles

Hinges



### Optional Energy Efficient Insulation

CFC free Polystyrene insulation with a rigid vinyl back skin, R factor of 6.25. Laminated PVC backing is available as a factory installed option. Calculated door section R-Values are in accordance with DASMA TDS-163.



### Exclusive RITS™ Design

Exclusive RITS™ design, "Reinforced Integral Truss System" design, for increased section strength and wind-load capabilities that include tongue and groove weather resistant meeting rails.

Distributed By:

